

HANDSET OPTIONS



Handset HSM
Controlbox SMART basic1
with anticollision
standby < = 0,1 W

XXXXX-C1XX-XXXXX-XX



Handset HSU with dial of height
and 4 memory positions
Controlbox SMART basic1 with anticollision
standby < = 0,1 W

XXXXX-C2XX-XXXXX-XX



Handset TOUCHbasic-DN
Controlbox SMART basic1
with anticollision
standby < = 0,1 W


XXXXX-C4XX-XXXXX-XX



Handset TOUCHfx with dial of height
and 4 memory positions
Controlbox SMART basic1 with anticollision
standby < = 0,1 W


XXXXX-C5XX-XXXXX-XX

COLOURS




grey metallic
RAL 9006 / 60G

XXXXX-XXXX-XXXXX-01



white
RAL 9016 / 60G

XXXXX-XXXX-XXXXX-03



black
RAL 9005 / 60G

XXXXX-XXXX-XXXXX-02

HON *move*®

HEIGHT ADJUSTABLE FRAMES



TANDEM
3 - SEGMENT

HON *move*®

Height adjustable frame

TANDEM

3 - segment, 1 - motor

TECHNICAL SPECIFICATION:

Adjustable width W (without desktop): **1175 - 1775 mm**

Adjustable height H (without desktop): **620 - 1310 mm**

Depth D (without desktop): **1480 mm**

Profile tube: **80 x 80 / 70 x 70 / 60 x 60 mm**


Maximum load capacity (desktop included): **80 kg**

Time load capacity: **10 %**, max. 2 min. / 18 min.

Lifting time: **30 mm / s**

Warranty: **5 years**

T23B0-CX01-00000-XX

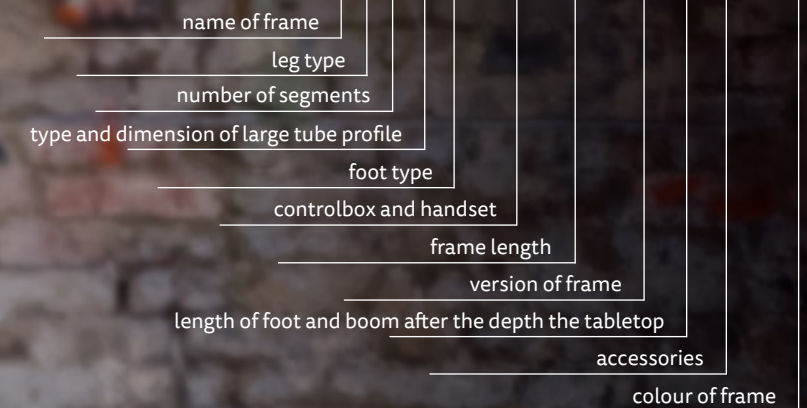

INFORMATION FOR LOADING:
Weight (without desktop): **66 kg**