

HANDSET OPTIONS



Handset **HSM**
Power unit DMP240
standby < = 0,1 W

XXXXX-**D1**XX-XXXXX-XX



Handset **HSU** with dial of height
and 4 memory positions
Power unit DMP240
standby < = 0,1 W

XXXXX-**D2**XX-XXXXX-XX



Handset **TOUCH-B-UD**
Power unit DMP240
standby < = 0,1 W

XXXXX-**D4**XX-XXXXX-XX



Handset **TOUCH-C-FX** with dial of height
and 4 memory positions
Power unit DMP240
standby < = 0,1 W

XXXXX-**D5**XX-XXXXX-XX

COLOURS




grey metallic
RAL 9006 / 60G

XXXXX-XXXX-XXXXX-**01**



white
RAL 9016 / 60G

XXXXX-XXXX-XXXXX-**03**



black
RAL 9005 / 60G

XXXXX-XXXX-XXXXX-**02**

HON *move*®

HEIGHT ADJUSTABLE FRAMES





DS SIMPLEX 1
3-SEGMENT

HON *move*®


Height adjustable frame
DS SIMPLEX 1
3-segment, 2 - motor

TECHNICAL SPECIFICATION:
Adjustable width W (without desktop): **1150 - 1750 mm**
Adjustable height H (without desktop): **620 - 1280 mm**
Depth D (without desktop): **675 mm**
Profile tube: **70 x 70 / 60 x 60 / 50 x 50 mm**
Maximum load capacity (desktop included): **80 kg**
Time load capacity: **10 %**, max. 2 min. / 18 min.
Lifting time: **35 mm / s**
Warranty: **3 years**


S13AX-DX01-00102-XX

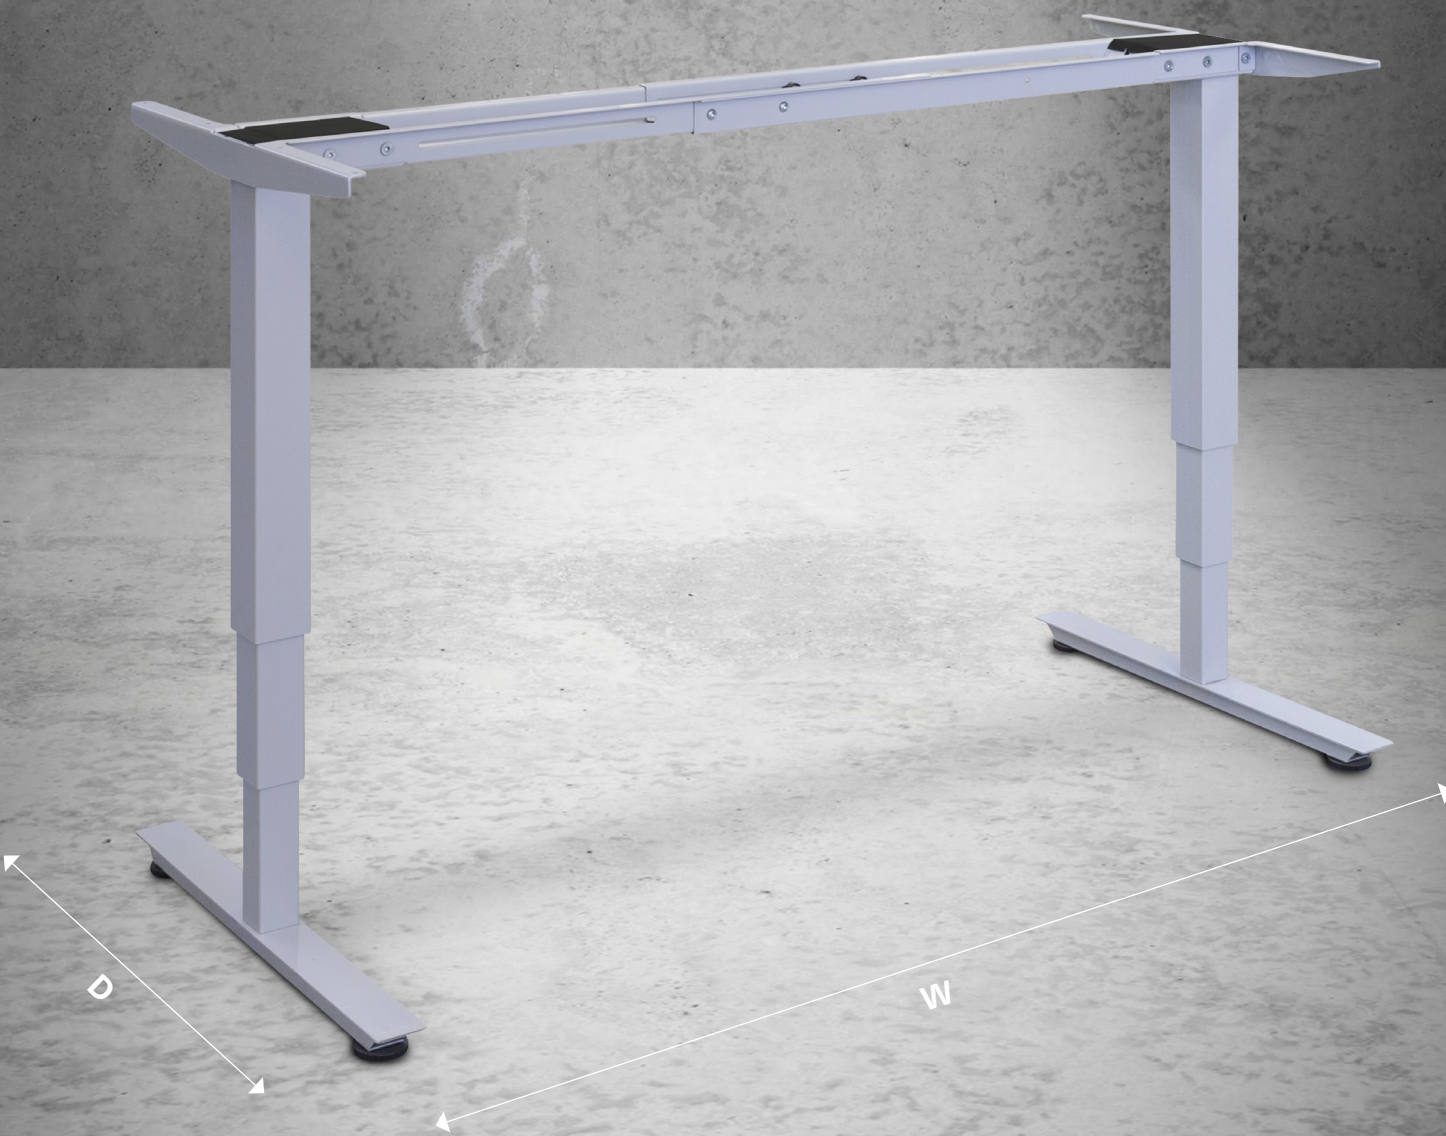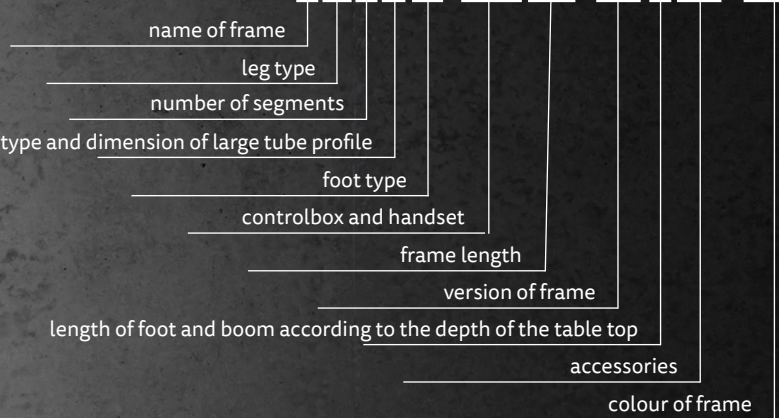

H

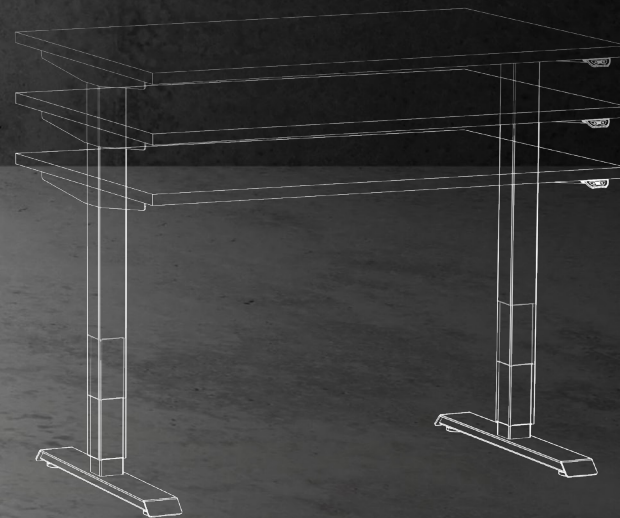

INFORMATION FOR LOADING:
Weight (without desktop): **28 kg**
Package dimensions: **1195 x 265 x 115 mm**
1 europalette = **45 pcs. = 1280 kg**



Foot V1 XXXX1-XXXX-XXXXXX-XX



Foot V4 XXXX4-XXXX-XXXXXX-XX



Foot V5 XXXX5-XXXX-XXXXXX-XX