


#### HANDSET OPTIONS



Handset HSM  
Controlbox SMART basic1  
with anticollision  
standby < = 0,1 W

XXXXX-C1XX-XXXXX-XX



Handset HSU with dial of height  
and 4 memory positions  
Controlbox SMART basic1 with anticollision  
standby < = 0,1 W

XXXXX-C2XX-XXXXX-XX



Handset TOUCHbasic-DN  
Controlbox SMART basic1  
with anticollision  
standby < = 0,1 W


XXXXX-C4XX-XXXXX-XX



Handset TOUCHfx with dial of height  
and 4 memory positions  
Controlbox SMART basic1 with anticollision  
standby < = 0,1 W


XXXXX-C5XX-XXXXX-XX

#### COLOURS




grey metallic  
RAL 9006 / 60G

XXXXX-XXXX-XXXXX-01



white  
RAL 9016 / 60G

XXXXX-XXXX-XXXXX-03



black  
RAL 9005 / 60G

XXXXX-XXXX-XXXXX-02

# HON *move*®

HEIGHT ADJUSTABLE FRAMES



TANDEM  
2 - SEGMENT

# HON *Move*®

Height adjustable frame

## TANDEM

2 - segment, 1 - motor

### TECHNICAL SPECIFICATION:

Adjustable width W (without desktop): **1175 - 1775 mm**

Adjustable height H (without desktop): **680 - 1180 mm**

Depth D (without desktop): **1480 mm**

Profile tube: **80 x 80 / 70 x 70 mm**



Maximum load capacity (desktop included): **80 kg**

Time load capacity: **10 %**, max. 2 min. / 18 min.

Lifting time: **30 mm / s**

Warranty: **5 years**

**T22B0-CX01-00000-XX**

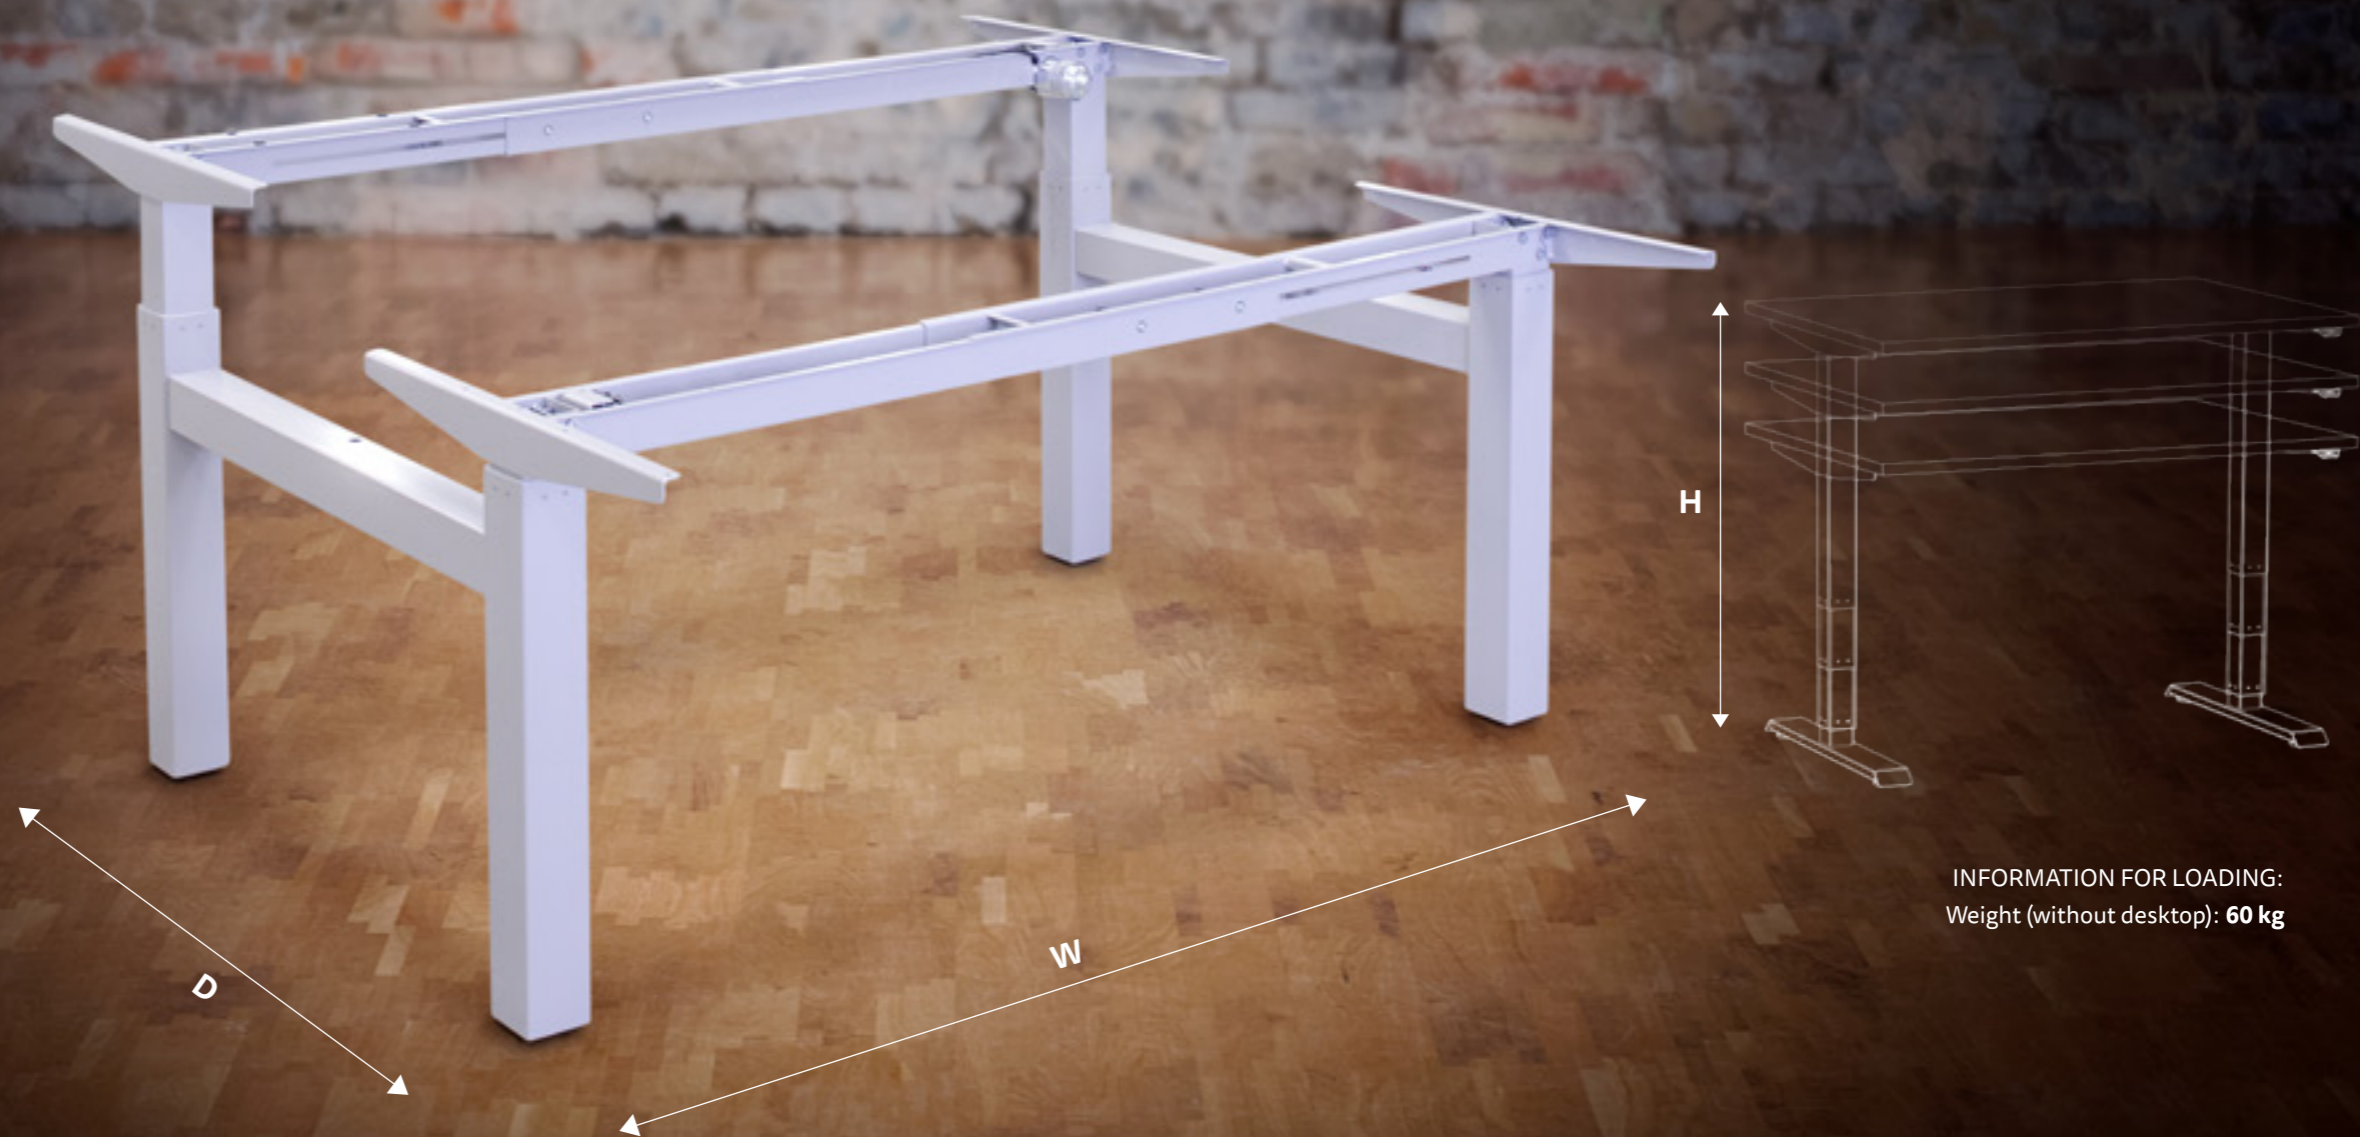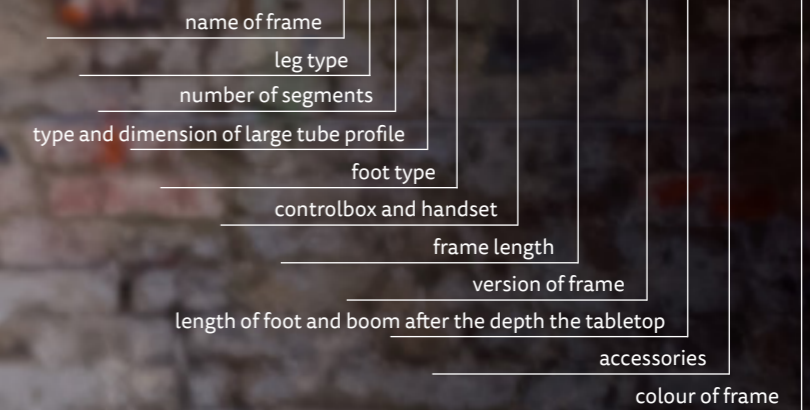

INFORMATION FOR LOADING:  
Weight (without desktop): **60 kg**